



# HOFFMAN ESTATES

---

GROWING TO GREATNESS

November 17, 2025

**SUBJECT: VILLAGE OF HOFFMAN ESTATES  
2025 STORM SEWER REHABILITATION  
CLARIFICATIONS AND RESPONSE TO QUESTIONS #2**

To Whom It May Concern:

This letter is meant to clarify additional questions and concerns regarding the 2025 Storm Sewer Rehabilitation Project. This is not considered an addendum, but an additional resource for your information and consideration.


1. There are some pipe outlets that are partially or completely under lake water levels. This level varies depending on time of year and storm runoff events. It will be the responsibility of the contractor to locate the inverts of these pipes. This work is covered under the 'Dewatering' pay item.
2. The use of pumps to lower water levels in ponds, pipes, and structures is allowed and covered under the 'Dewatering' pay item.
3. FES-0454 is an outfall structure at the North end of Larchmont Road. The pipe to be lined connects to this outlet below ground elevation as shown in the attached detail.

The above clarifications have been made to assist you in preparing your bid. Thank you for your consideration.

Sincerely,

*Oscar Gomez*


Oscar Gomez, P.E.  
Civil Engineer II

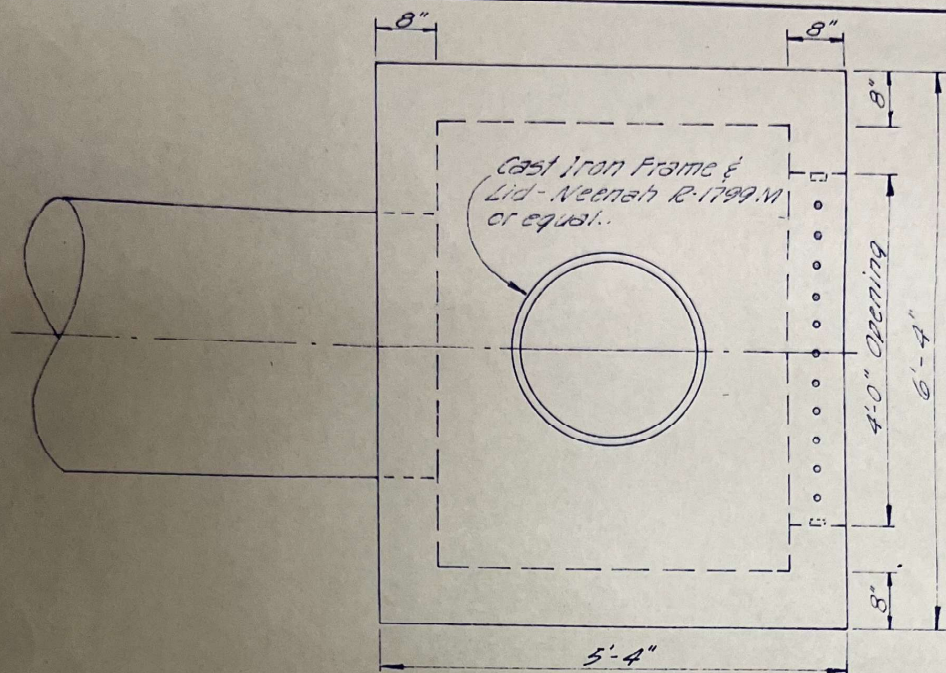

~ PLAN ~

REINFORCING:

- Roof - #4 rods at 4" C-C both ways, 2" from bottom.
- Walls - #4 rods at 4" C-C both ways, 2" from outside face.
- Floor - Same pattern, 2" from bottom of slab.

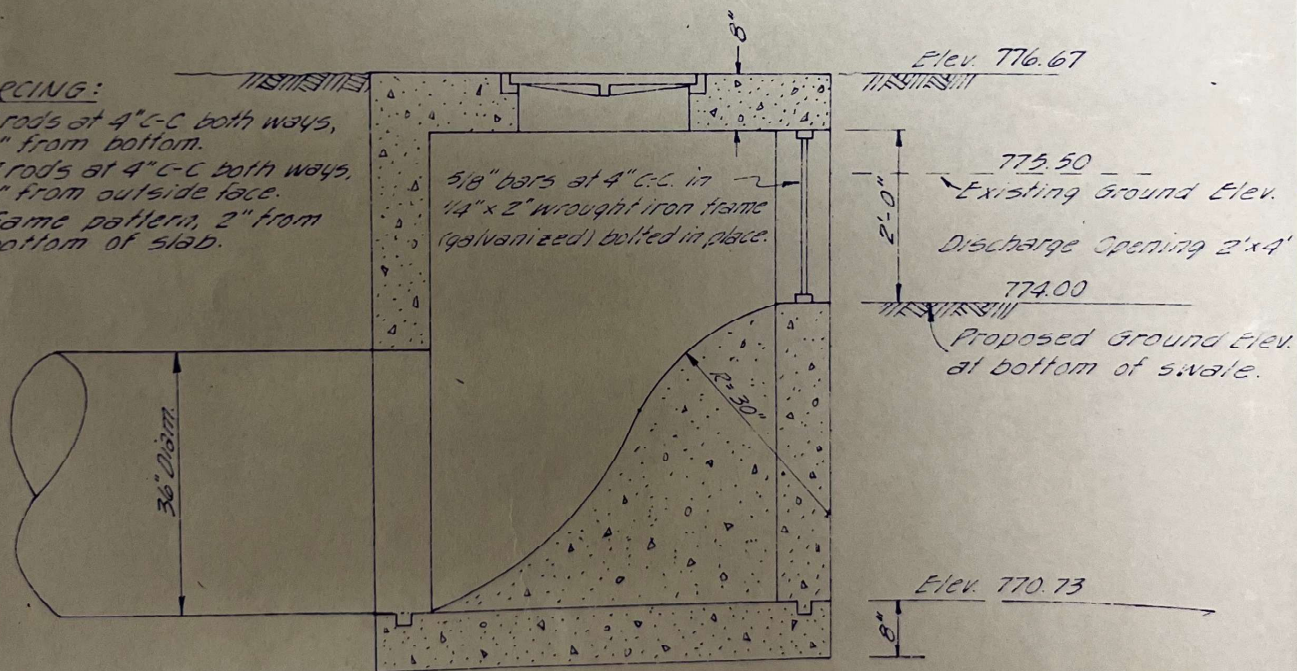

~ SECTION ~

STORM SEWER OUTLET CHAMBER

Scale: 1" = 2'-0"

~ N. End of Larchmont Road ~